



kicad



kicad

GerbView

25 de septiembre de 2017

Índice

1. Introducción a GerbView	2
2. Interface	2
2.1. Main window	2
2.2. Barra de herramientas superior	3
2.3. Barra de herramientas izquierda	4
2.4. Layers Manager	5
3. Comandos de la barra de menús	6
3.1. Menú archivo	6
3.2. Menú preferencias	6
3.3. Menú otros	7
4. Display modes	7
4.1. Raw mode	7
4.2. Stacked mode	8
4.3. Transparency mode	8
4.4. Layer occlusion	8
5. Moving items	9
6. Printing	9

Manual de referencia

Copyright

Este documento está protegido por Copyright © 2010 a 2015 de sus autores, mencionados a continuación. Puede distribuirlo y/o modificarlo bajo los términos de la GNU General Public License (<http://www.gnu.org/licenses/gpl.html>), versión 3 o posterior, o la Creative Commons Attribution License (<http://creativecommons.org/licenses/by/3.0/>), versión 3.0 o posterior.

Todas las marcas mencionadas en esta guía pertenecen a sus legítimos propietarios.

Contribuidores

El Equipo de KiCad.

Traducción

Antonio Morales <antonio1010.mr@gmail.com>, 2015-2016

Realimentación

Por favor dirija cualquier reporte de fallo, sugerencia o nuevas versiones a:

- Acerca de la documentación de KiCad: <https://github.com/KiCad/kicad-doc/issues>
- Acerca del software KiCad: <https://bugs.launchpad.net/kicad>
- Acerca de la traducción de la interfaz del software KiCad: <https://github.com/KiCad/kicad-i18n/issues>

Fecha de publicación y versión del software

Publicado el 14 de Febrero de 2015


1. Introducción a GerbView

GerbView is a Gerber file (RS-274X format) and Excellon drill file viewer. Up to 32 files can be displayed at once.


For more information about the Gerber file format please read [the Gerber File Format Specification](#). Details about drill file format can be found at [the Excellon format description](#).











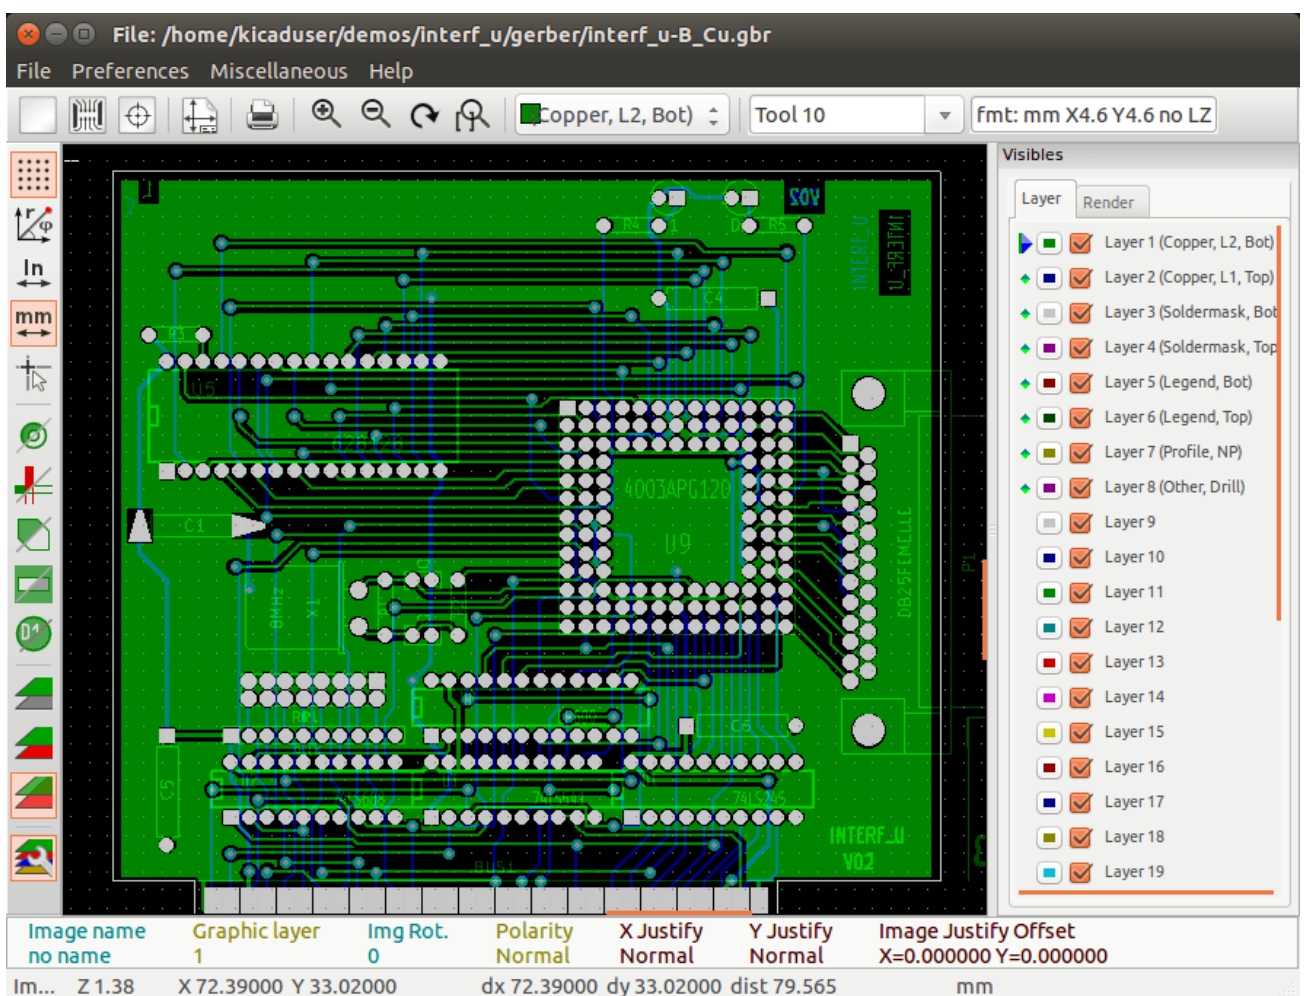
2. Interface

2.1. Main window
























2.2. Barra de herramientas superior




	Limpia todas las capas
	Carga fichero Gerber
	Load Excellon drill files
	Set page size
	Print
	Zoom in or out
	Redraw view
	Zoom auto (zoom fit)
	Select active layer
	Highlight items of selected D Code on the active layer
	Display info about active layer

2.3. Barra de herramientas izquierda

		Toggle grid visibility
		Toggle polar coordinates display
		Select inch or millimeter units
		Toggle full-screen cursor
		Display flashed items in sketch (outline) mode
		Display lines in sketch (outline) mode
		Display polygons in sketch (outline) mode
		Muestra los objetos negativos en modo sombreado
		Show/hide D Codes
		Select raw/stacked/transparency display mode
		Show/hide layers manager toolbar

2.4. Layers Manager

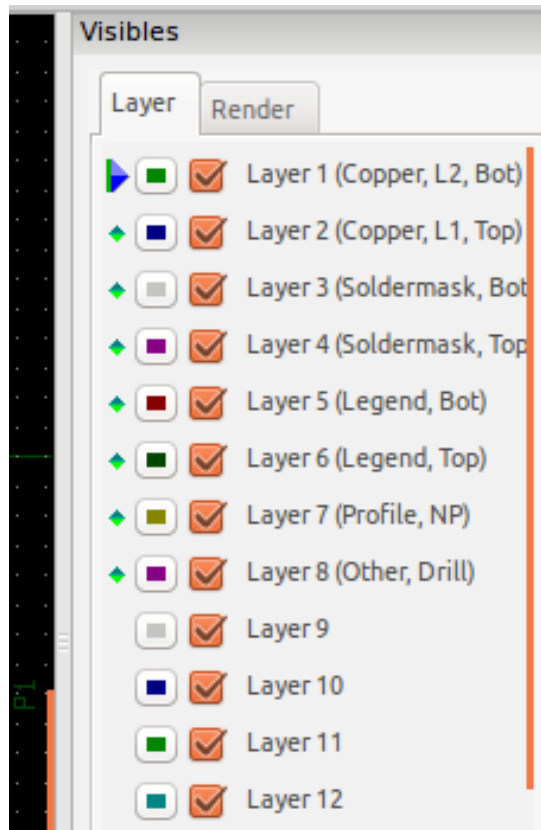


The Layers Manager controls and displays visibility of all layers. An arrow indicates the active layer, and each layer can be shown or hidden with the checkboxes.

Mouse button assignments:

- Left click: select the active layer
- Right click: show/hide/sort layers options
- Middle click (on color swatch): select the layer color


3. Comandos de la barra de menús

3.1. Menú archivo

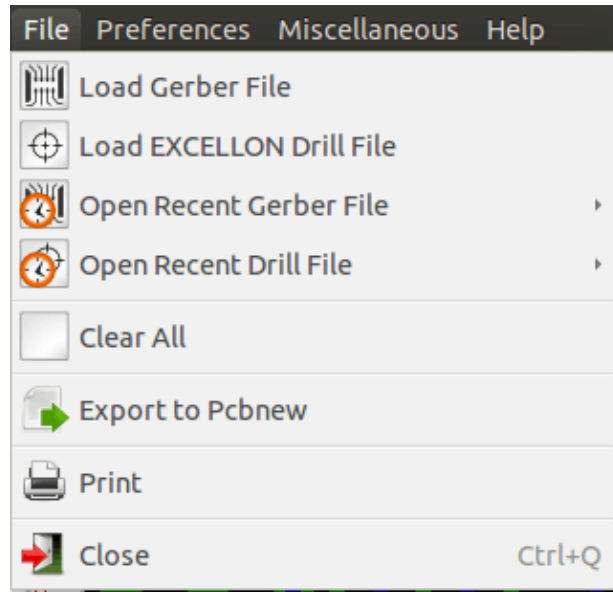


Export to Pcbnew is a limited capability to export Gerber files into Pcbnew. The final result depends on what features of the RS-274X format are used in the original Gerber files: rasterized items cannot be converted (typically negative objects), flashed items are converted to vias, lines are converted to track segments (or graphic lines for non-copper layers).

3.2. Menú preferencias

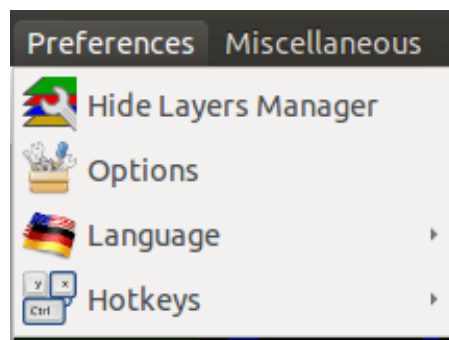

3.3. Menú otros

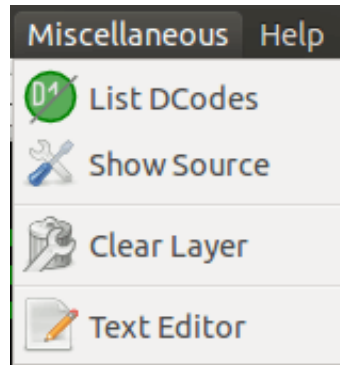

- **List DCodes** shows the D Code information for all layers.
- **Show Source** displays the Gerber file contents of the active layer in a text editor.
- **Clear Layer** erases the contents of the active layer.


4. Display modes

GerbView has three display modes which are useful for different situations or requirements.


nota

Stacked mode and Transparency mode provide a better graphical experience, but may be slower than Raw mode on some computers.


4.1. Raw mode

This mode is selected by . Each file and each item in the file are drawn in the order files are loaded. However, the active layer is drawn last.


When Gerber files have negative items (drawn in black), artifacts may be visible on already-drawn layers.

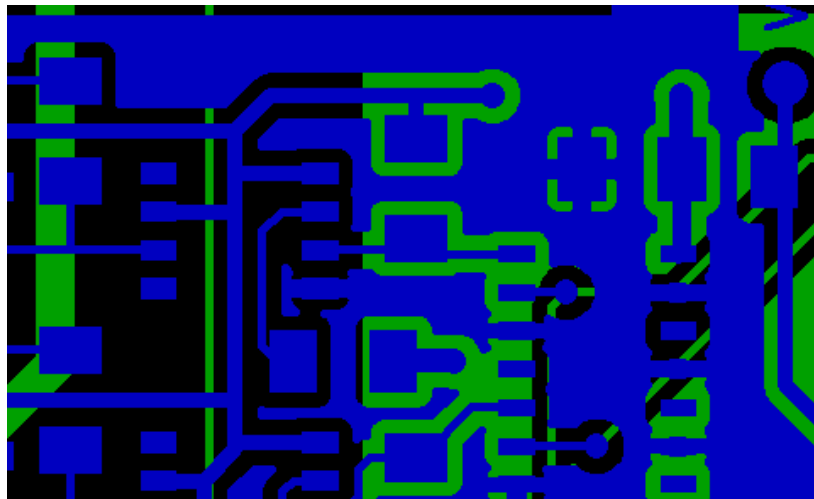


4.2. Stacked mode


Invoked by , each file is drawn in the order files are loaded. Again, the active layer is drawn last.

When Gerber files have negative items (drawn in black) there are no artifacts on already-drawn layers because this mode draws each file in a local buffer before it is shown on screen.

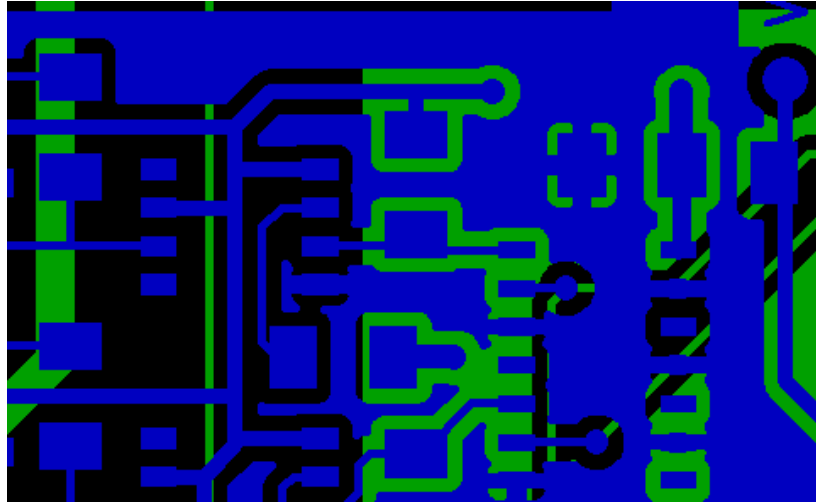

4.3. Transparency mode


Use  to display in this mode, where no artifacts are present and layers are blended together with the active layer on top.

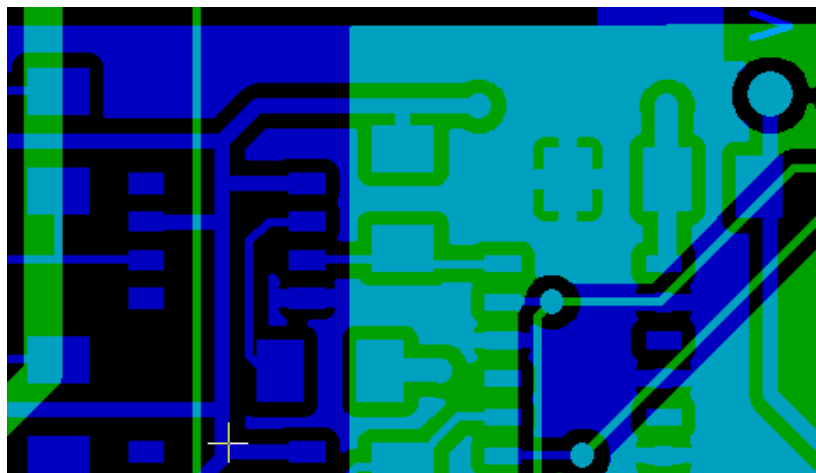


4.4. Layer occlusion

In raw or stacked mode, the active layer will be on top of other layers and hide items below it.

Here, layer 1 (green) is the active layer (note the triangle next to it) and so it is drawn on top of layer 2 (blue):

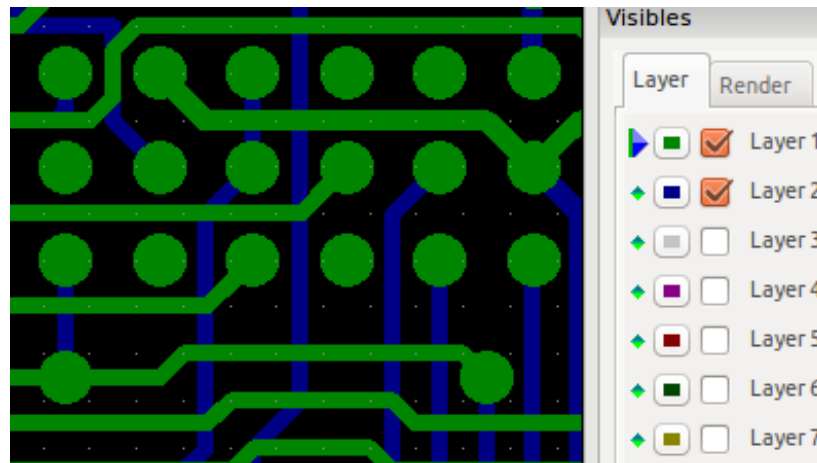

Making layer 2 (blue) the active layer brings it to the top:

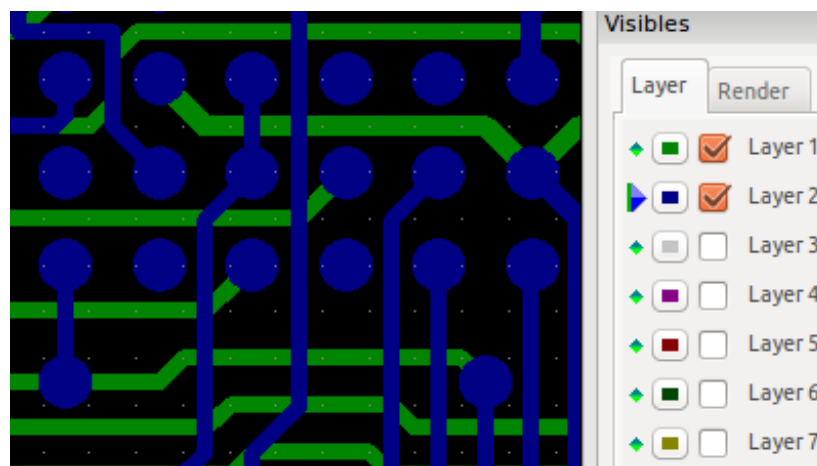

5. Moving items


Items may be selected by holding down the left mouse button and drawing a rectangle. Releasing the button picks up the items. A click of the left mouse button places the items.

6. Printing

To print layers, use the  icon or the **File** → **Print** menu.

atención



Be sure items are inside the printable area. Use  to select a suitable page format.

Note that many photoplotters support a large plottable area, much bigger than the page sizes used by most printers. Moving the entire layer set may be required.